




**4" DTH HAMMER
RECOMMENDED FOR QUARRY
ET CIVIL ENGINEERING**

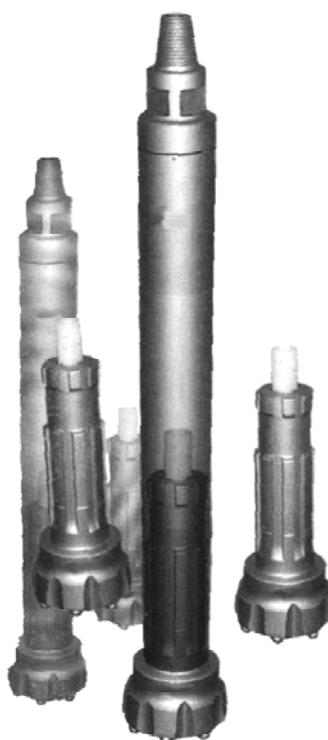

STENUICK INTERNATIONAL

Manufacturer of drilling material
34 RUE DES CHÂTELLIERS
BP 2803
45028 ORLEANS CEDEX 1

Téléphone : +33 (0)2 38 86 50 46
Télécopie : +33 (0)2 38 86 78 91
Email : stenuick@stenuick.fr
Site : www.stenuick.com






TECHNICAL CHARACTERISTICS

4" Stenuick DTH hammer
 Length : 920 mm
 Outside diameter : 97 mm
 Top thread : 2"3/8 API REG pin
 Operation pressure : 7 à 24 bar
 Bit diameter : 105 à 150 mm
 Weight : 38 kg

AIR CONSUMPTION

4.80 m³/min at 7 bar
 6.10 m³/min at 10 bar
 8.30 m³/min at 14 bar
 10.5 m³/min at 17 bar
 14.6 m³/min at 24 bar

BIT RANGE STENUICK04I / COP44 / DHD340A

Diameter		Flat face	Convex face	Concave face	Weight
(mm)	(inch)				(kg)
105	4"1/8		●		8.00
110	4"5/16	●	●		8.10
115	4"1/2		● ▲	●	8.20
120	4"3/4	▲	●		10.00
127	5"		●	●	10.60
130	5"1/8	●			10.70
140	5"1/2		●	●	12.90
150	5"7/8		●		13.50

● Domed inserts ▲ Ballistic inserts

