




English version

**12" DTH HAMMER
RECOMMENDED FOR WATER WELL DRILLING
AND CIVIL ENGINEERING**

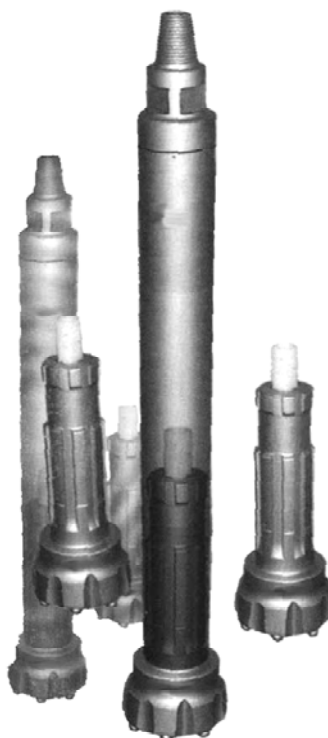

STENUICK INTERNATIONAL

French manufacturer of drilling material
34 RUE DES CHÂTELLIERS
BP 2803
45028 ORLEANS CEDEX 1

Téléphone : +33 (0)2 38 86 50 46

Télécopie : +33 (0)2 38 86 78 91

Email : stenuick@stenuick.fr

Site : www.stenuick.com






TECHNICAL CHARACTERISTICS

12" Stenuick DTH hammer
 Length : 1550 mm
 Outside diameter : 270 mm
 Top thread : 6"5/8 API REG pin
 Operation pressure : 7 à 24 bar
 Bit diameter : 311 to 60 mm
 Weight : 465 kg

AIR CONSUMPTION

20.90 m3/min a 7 bar
 31.10 m3/min a 10 bar
 43.80 m3/min a 14 bar
 53.80 m3/min a 17 bar
 71.60 m3/min a 24 bar

BIT RANGE STENUICK12M / SD12

Diameter		Flat face	Convex face	Concave face	Weight
(mm)	(inch)				(kg)
311	12"1/4			●	133.00
381	15"			●	208.00
445	17"1/2			●	245.00
508	20"			●	325.00
533	21"			●	344.00
559	22"			●	378.00
610	24"			●	415.00

● Domed inserts ▲ Ballistic inserts