



# DRILL PIPES




## CATEGORY

Drill pipes

## TECHNICAL CHARACTERISTICS

| Diameter (A) | Thread   | Thickness (B) | Length (L) |      |      |      |      |      | Measures |     |    |    |     |
|--------------|----------|---------------|------------|------|------|------|------|------|----------|-----|----|----|-----|
|              |          |               | 1.00       | 1.50 | 2.00 | 3.00 | 4.50 | 6.00 | C        | D   | E  | F  | G   |
| 48           | 40RD6    | 5             | ●          | ●    | ●    | ●    |      |      | 22       | 41  | 40 | 27 | 52  |
| 57           | 40RD6    | 5             | ●          | ●    | ●    | ●    |      |      | 22       | 41  | 40 | 27 | 52  |
| 70           | 50RD6    | 4             | ●          | ●    | ●    | ●    |      |      | 30       | 55  | 40 | 27 | 62  |
| 89           | 70RD4    | 5             | ●          | ●    | ●    | ●    |      |      | 43       | 65  | 40 | 27 | 78  |
|              |          | 6.3           | ●          | ●    | ●    | ●    |      |      | 43       | 65  | 40 | 27 | 78  |
| 76           | 2"3/8REG | 4             | ●          | ●    | ●    | ●    |      |      | 30       | 65  | 40 | 27 | 85  |
|              | 2"3/8REG | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 30       | 65  | 40 | 27 | 85  |
| 89           | 2"3/8REG | 4             | ●          | ●    | ●    | ●    |      |      | 30       | 65  | 40 | 27 | 78  |
|              | 2"3/8REG | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 30       | 65  | 40 | 27 | 78  |
| 114          | 3"1/2REG | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 43       | 95  | 50 | 30 | 75  |
| 127          | 3"1/2REG | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 43       | 95  | 50 | 30 | 80  |
| 140          | 4"1/2REG | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 58       | 120 | 50 | 30 | 95  |
| 194          | 6"5/8REG | 12.5          | ●          | ●    | ●    | ●    |      | ●    | 80       | 152 | 70 | 30 | 127 |
| 89           | 2"3/8IF  | 4             | ●          | ●    | ●    | ●    |      |      | 43       | 65  | 40 | 27 | 110 |
|              |          | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 43       | 65  | 40 | 27 | 110 |
| 114          | 3"1/2IF  | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 58       | 95  | 50 | 30 | 120 |
| 127          | 3"1/2IF  | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 58       | 95  | 50 | 30 | 120 |
| 140          | 3"1/2IF  | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 58       | 120 | 50 | 30 | 95  |
| 114          | 3"1/2FH  | 6.3           | ●          | ●    | ●    | ●    | ●    | ●    | 58       | 95  | 50 | 30 | 115 |

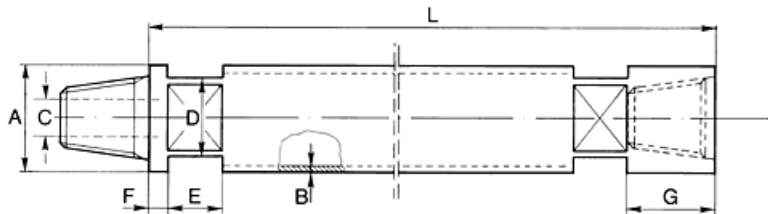

### IMPORTANT:

The technical characteristics can be modified without advance notice



34, rue des Châtelliers  
 BP 2803  
 45028 Orléans Cedex 1  
 Téléphone : 02 38 86 50 46  
 Télécopie : 02 38 86 78 91  
 Email : [stenuick@stenuick.fr](mailto:stenuick@stenuick.fr)  
 Site : [www.stenuick.fr](http://www.stenuick.fr)