



STANDARD DRILL PIPES

FEATURES

Our drill rods, welded by friction, are suited to work as well dth hammers as rotary and are mainly used for the vertical drilling.

COMPOSITION

Our rods consist:

- N80 seamless steel tube
- Friction welded tool joint with a heat treatment on the threads


CATEGORY

Drilling equipment



TECHNICAL CHARACTERISTICS

Diam. (mm) A	Thread	Thickness (mm) B	Length (mm) L					Dimensions (mm)					
			1000	1500	2000	3000	4500	6000	C	D	E	F	G
48	40RD6	5	●	●	●	●			22	41	40	27	52
57	40RD6	5	●	●	●	●			22	41	40	27	52
70	50RD6	4	●	●	●	●			30	55	40	27	62
89	70RD4	4	●	●	●	●			43	65	40	27	78
		6.3	●	●	●	●			43	65	40	27	78
76	2"3/8REG	4	●	●	●	●			30	65	40	27	85
	2"3/8REG	6.3	●	●	●	●	●	●	30	65	40	27	85
89	2"3/8REG	4	●	●	●	●			30	65	40	27	78
	2"3/8REG	6.3	●	●	●	●	●	●	30	65	40	27	78
89	2"7/8REG	4	●	●	●	●	●	●	36	65	40	27	110
	2"7/8REG	6.3	●	●	●	●	●	●	36	65	40	27	110
102	2"7/8REG	6.3	●	●	●	●	●	●	36	75	50	30	100
114	3"1/2REG	6.3	●	●	●	●	●	●	43	95	50	30	75
127	3"1/2REG	6.3	●	●	●	●	●	●	43	95	50	30	80
140	4"1/2REG	6.3	●	●	●	●	●	●	58	120	50	30	95
194	6"5/8REG	12.5	●	●	●	●		●	80	152	70	30	127
89	2"3/8IF	4	●	●	●	●			43	65	40	27	110
		6.3	●	●	●	●	●	●	43	65	40	27	110
114	3"1/2IF	6.3	●	●	●	●	●	●	58	95	50	30	120
127	3"1/2IF	6.3	●	●	●	●	●	●	58	95	50	30	120
140	3"1/2IF	6.3	●	●	●	●	●	●	58	120	50	30	95
114	3"1/2FH	6.3	●	●	●	●	●	●	58	95	50	30	115

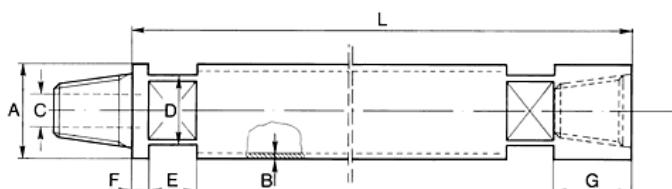

34, rue des Châtelliers
BP 2803
45028 Orléans Cedex 1
Téléphone : 02 38 86 50 46
Télécopie : 02 38 86 78 91
Email : stenuick@stenuick.fr
Site : www.stenuick.fr

IMPORTANT:

The technical characteristics can be modified without notice